

30 TONNES CARRIERS

AUTOMATIC ENERGY PER **BLOW ADJUSTMENT**

AUTONOMOUS WORKING PRESSURE CONTROL

- no more regular nitrogen controls and recharges on jobsites.
- Made in France: superior quality steel and manufacturing excellence.
- Operator friendly: blank firing protection, automatic lubrication, energy recovery system, easy maintenance.
- Carrier friendly: anti-vibration dampeners, pressure spikes removal.




CUTTING-EDGE TECHNOLOGY RUTHLESS FOR ROCKS

WEIGHT & DIMENSIONS		
WEIGHT (KG/LB)		
BREAKER	1,205	2,657
+ MOUNTED TOOL	1,320	2,910
+ MOUNTED ADAPTER PLATE (MAX)	1,665	3,671
DIMENSIONS (MM/IN)		
A	1,845	72.6
В	431	16.9
C	460	18.11
D	360	14.17
E	60	2.36
F	6	0.23

OPERATING INFORMATION		
CARRIER WEIGHT RANGE (MIN-MAX, MT)		18-30
OIL FLOW (MIN-MAX, L/MIN / GPM)	120-170	31.7-45
MAXIMUM OPERATING PRESSURE (BAR/PSI)	135	1,958
MAXIMUM BACK PRESSURE (BAR/PSI)	6	87
INPUT POWER (KW)		38.3
STRIKING FREQUENCY (BPM)		285-1,050
NOISE LEVEL /10M (DBA)		94
AUTOMATIC LUBRICATION	·	standard
SOUNDPROOFING	·	standard
PRESSURIZATION		preinstalled

OPTIONS	CPN
PRESSURIZATION KIT	86372505
ANTISEISMIC	upon request
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

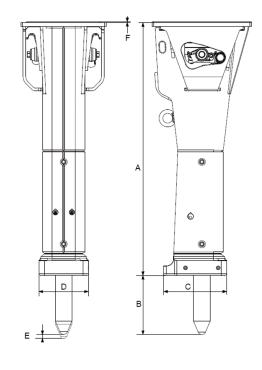

CONSUMABLES	CPN
GREASE CARTRIDGES (X20)	86784758
ABL2 GREASE BUCKET (24 KG)	86772969
ABLF GREASE BUCKET (24 KG)	86772977

MAINTENANCE KITS	CPN
LEVEL 1	86599438
LEVEL 2	86600541
LEVEL 2+	86599446

TOOLS						
DIAMETER (MM/IN)	122/5	122/5	122/5	122/5	122/5	122/5
LENGTH (MM/IN)	1100/43.30	1300/51.18	1100/43.30	1300/51.18	1100/43.30	1300/51.18
WEIGHT (KG/LB)	94/207	109/240	91/201	110/243	96/212	115/254
CPN	86420783	86449360	86420791	86382082	86421955	86811452



Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are standard written warranties, which will be furnished upon request. Komatsu and other trademarks and service marks used herein are the property of Komatsu Ltd., KMC, or their respective owners or licensees. © 2019 KMC. All rights reserved.



EN/US - V32.EN.US.052020



AUTOMATIC ENERGY PER BLOW ADJUSTMENT

AUTONOMOUS WORKING PRESSURE CONTROL

TPS SYSTEM: IMPROVED **TOOL LIFESPAN**


- and recharges on jobsites.
- Made in France: superior quality steel and manufacturing excellence.
- Operator friendly: blank firing protection, automatic lubrication, energy recovery system, easy maintenance.
- Carrier friendly: anti-vibration dampeners, pressure spikes removal.

CUTTING-EDGE TECHNOLOGY RUTHLESS FOR ROCKS

WEIGHT & DIMENSIONS		
WEIGHT (KG/LB)		
BREAKER	2,065	4,553
+ MOUNTED TOOL	2,258	4,978
+ MOUNTED ADAPTER PLATE (MAX)	2,734	6,027
DIMENSIONS (MM/IN)		
A	2,093	82.4
B1	590	23.4
B2	740	29.2
C	568	22.3
D	367	14.4
E	64	2.5

OPERATING INFORMATION		
CARRIER WEIGHT RANGE (MIN-MAX, MT)		27-40
OIL FLOW (MIN-MAX, L/MIN / GPM)	180-265	47.6-70
MAXIMUM OPERATING PRESSURE (BAR/PSI)	165	2,393
MAXIMUM BACK PRESSURE (BAR/PSI)	6	116
INPUT POWER (KW)		72.9
STRIKING FREQUENCY (BPM)		345-1,160
NOISE LEVEL /10M (DBA)		96
AUTOMATIC LUBRICATION		standard
SOUNDPROOFING		standard
PRESSURIZATION		preinstalled

OPTIONS	CPN
PRESSURIZATION KIT	86372505
ANTISEISMIC	upon request
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

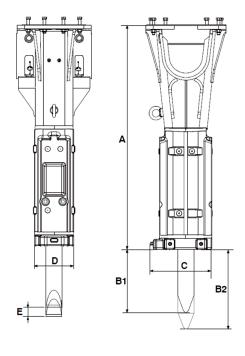

CONSUMABLES	CPN
GREASE CARTRIDGES (X20)	86784758
ABL2 GREASE BUCKET (24 KG)	86772969
ABLF GREASE BUCKET (24 KG)	86772977

MAINTENANCE KITS	CPN
BASIC	86738317
LEVEL 1	86700820
LEVEL 2	86700838

TOOLS					
DIAMETER (MM/IN)	150/5.9	150/5.9	150/5.9	150/5.9	150/5.9
LENGTH (MM/IN)	1,350/53.14	1,500/59.05	1,350/53.14	1,500/59.05	1,350/53.14
WEIGHT (KG/LB)	170/375	191/421	172/379	193/425	180/387
CPN	86492246	86593522	86608130	86604931	86492253



Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are standard written warranties, which will be furnished upon request. Komatsu and other trademarks and service marks used herein are the property of Komatsu Ltd., KMC, or their respective owners or licensees. © 2019 KMC. All rights reserved.



EN/US - V45.EN.US.052020



AUTOMATIC ENERGY PER BLOW ADJUSTMENT

AUTONOMOUS WORKING PRESSURE CONTROL

TPS SYSTEM: IMPROVED TOOL LIFESPAN


- Hydraulic accumulator: no more regular nitrogen controls and recharges on jobsites.
- Made in France: superior quality steel and manufacturing excellence.
- Operator friendly: blank firing protection, automatic lubrication, energy recovery system, easy maintenance.
- Carrier friendly: anti-vibration dampeners, pressure spikes removal.

CUTTING-EDGE TECHNOLOGY RUTHLESS FOR ROCKS

WEIGHT & DIMENSIONS		
WEIGHT (KG/LB)		
BREAKER	2,765	6,096
+ MOUNTED TOOL	3,079	6,788
+ MOUNTED ADAPTER PLATE (MAX)	3,593	7,921
DIMENSIONS (MM/IN)		
A	2,312	91.02
B1	644	25.3
B2	944	37.2
C	649	25.55
D	420	16.53
E	69	2.7

OPERATING INFORMATION		
CARRIER WEIGHT RANGE (MIN-MAX, MT)		35-60
OIL FLOW (MIN-MAX, L/MIN / GPM)	240-320	63.4-85
MAXIMUM OPERATING PRESSURE (BAR/PSI)	165	2,393
MAXIMUM BACK PRESSURE (BAR/PSI)	8	116
INPUT POWER (KW)		88
STRIKING FREQUENCY (BPM)		330-1,045
NOISE LEVEL /10M (DBA)		96
AUTOMATIC LUBRICATION		standard
SOUNDPROOFING		standard
PRESSURIZATION		preinstalled

OPTIONS	CPN
PRESSURIZATION KIT	86372505
SOFTSTART	upon request
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

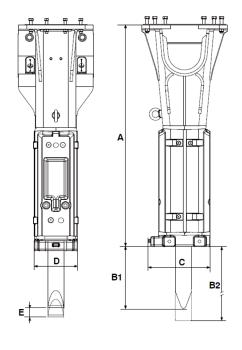

CONSUMABLES	CPN
GREASE CARTRIDGES (X20)	86784758
ABL2 GREASE BUCKET (24 KG)	86772969
ABLF GREASE BUCKET (24 KG)	86772977

MAINTENANCE KITS	CPN
BASIC	86687753
LEVEL 1	86700804
LEVEL 2	86700812

TOOLS					
DIAMETER (MM/IN)	170/6.69	170/6.69	170/6.69	170/6.69	170/6.69
LENGTH (MM/IN)	1,500/59.05	1,500/59.05	1,800/70.86	1,500/59.05	1,800/70.86
WEIGHT (KG/LB)	241/531	246/542	299/659	257/567	314/692
CPN	86624020	86612496	86640729	86624046	86669850



Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are standard written warranties, which will be furnished upon request. Komatsu and other trademarks and service marks used herein are the property of Komatsu Ltd., KMC, or their respective owners or licensees. © 2019 KMC. All rights reserved.





AUTOMATIC ENERGY PER BLOW ADJUSTMENT

AUTONOMOUS WORKING PRESSURE CONTROL

TPS SYSTEM: IMPROVED **TOOL LIFESPAN**


- and recharges on jobsites.
- Made in France: superior quality steel and manufacturing excellence.
- Operator friendly: blank firing protection, automatic lubrication, energy recovery system, easy maintenance.
- Carrier friendly: anti-vibration dampeners, pressure spikes removal.

CUTTING-EDGE TECHNOLOGY RUTHLESS FOR ROCKS

WEIGHT & DIMENSIONS		
WEIGHT (KG/LB)		
BREAKER	4,508	9,939
+ MOUNTED TOOL	4,942	10,896
+ MOUNTED ADAPTER PLATE (MAX)	5,969	13,159
DIMENSIONS (MM/IN)		
A	2,709	106.6
В	793.5	31.24
C	730	28.7
D	635	25
E	80	3.1

	45-75
380-420	100.4-111
165	2,393
8	116
	115.5
	380-950
	100
	standard
	standard
	standard
	preinstalled
	165

OPTIONS	CPN
PRESSURIZATION KIT	86372505
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

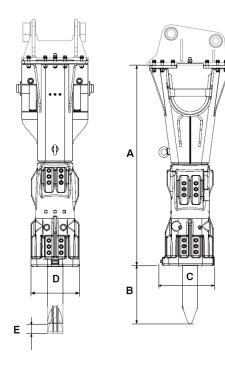

CONSUMABLES	CPN
GREASE CARTRIDGES (X20)	86784758
ABL2 GREASE BUCKET (24 KG)	86772969
ABLF GREASE BUCKET (24 KG)	86772977

MAINTENANCE KITS	CPN
BASIC	101024897
LEVEL 1	101024898
LEVEL 2	101024899

TOOLS				
DIAMETER (MM/IN)	202/7.95	202/7.95	202/7.95	202/7.95
LENGTH (MM/IN)	1,800/70.86	1,800/70.86	1,800/70.86	1,800/70.86
WEIGHT (KG/LB)	410/904	404/891	417/919	434/957
CPN	86624061	86624087	86611845	86624079



Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are standard written warranties, which will be furnished upon request. Komatsu and other trademarks and service marks used herein are the property of Komatsu Ltd., KMC, or their respective owners or licensees. © 2019 KMC. All rights reserved.



EN/US - V65.EN.US.052020



AUTOMATIC ENERGY PER BLOW ADJUSTMENT

AUTONOMOUS WORKING PRESSURE CONTROL

DUAL LUBRICATION SYSTEM


- Hydraulic accumulator: no more regular nitrogen controls and recharges on jobsites.
- Made in France: superior quality steel and manufacturing excellence.
- Operator friendly: blank firing protection, automatic lubrication, energy recovery system, easy maintenance.
- Carrier friendly: anti-vibration dampeners, pressure spikes removal.

CUTTING-EDGE TECHNOLOGY RUTHLESS FOR ROCKS

WEIGHT & DIMENSIONS		
WEIGHT (KG/LB)		
BREAKER	5,326	11,742
+ MOUNTED TOOL	5,889	12,983
+ MOUNTED ADAPTER PLATE (MAX)	6,909	15,232
DIMENSIONS (MM/IN)		
A	3,043	119.8
В	700	27.5
C	710	28
D	620	24.5
E	125	4.9

OPERATING INFORMATION		
CARRIER WEIGHT RANGE (MIN-MAX, MT)		55-90
OIL FLOW (MIN-MAX, L/MIN / GPM)	400-500	105.7-132
MAXIMUM OPERATING PRESSURE (BAR/PSI)	180	2,611
MAXIMUM BACK PRESSURE (BAR/PSI)	15	218
INPUT POWER (KW)		150
STRIKING FREQUENCY (BPM)		290-550
NOISE LEVEL /10M (DBA)		95
AUTOMATIC LUBRICATION		standard
SOUNDPROOFING		standard
BUCKET CYLINDER VALVE		standard
PRESSURIZATION		preinstalled

OPTIONS	CPN
PRESSURIZATION KIT	86372505
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

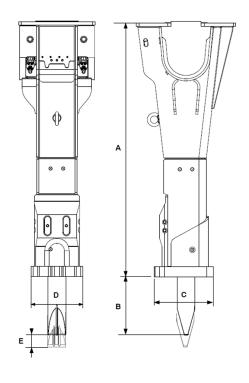

CONSUMABLES	CPN
GREASE CARTRIDGES (X20)	86784758
ABL2 GREASE BUCKET (24 KG)	86772969
ABLF GREASE BUCKET (24 KG)	86772977

MAINTENANCE KITS	CPN
BASIC	86798311
LEVEL 1	86798329
LEVEL 2	101023249

TOOLS								
DIAMETER (MM/IN)	214/8.43	214/8.43	214/8.43	214/8.43	214/8.43	214/8.43	214/8.43	214/8.43
LENGTH (MM/IN)	1,845/72.63	2,025/79.72	1,845/72.63	1,845/72.63	2,025/79.72	2,025/79.72	1,845/72.63	2,025/79.72
WEIGHT (KG/LB)	482.5/1,064	533/1,175	463.4/1,022	483.3/1,066	534.3/1,178	535.3/1,180	512/1,129	563/1,241
CPN	86792520	86804804	86792553	86759842	86799855	86799863	86792538	86804176



Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are standard written warranties, which will be furnished upon request. Komatsu and other trademarks and service marks used herein are the property of Komatsu Ltd., KMC, or their respective owners or licensees. © 2019 KMC. All rights reserved.



EN/US - V6000.EN.US.052020



120 TONNES CARRIERS

AUTOMATIC ENERGY PER BLOW ADJUSTMENT

AUTONOMOUS WORKING PRESSURE CONTROL

DUAL LUBRICATION SYSTEM


- Hydraulic accumulator: no more regular nitrogen controls and recharges on jobsites.
- Made in France: superior quality steel and manufacturing excellence.
- Operator friendly: blank firing protection, automatic lubrication, energy recovery system, easy maintenance.
- Carrier friendly: anti-vibration dampeners, pressure spikes removal.

CUTTING-EDGE TECHNOLOGY RUTHLESS FOR ROCKS

WEIGHT & DIMENSIONS		
WEIGHT (KG/LB)		
BREAKER	5,927	13,067
+ MOUNTED TOOL	6,490	14,308
+ MOUNTED ADAPTER PLATE (MAX)	7,630	16,821
DIMENSIONS (MM/IN)		
A	3,043	119.8
В	700	27.5
C	800	31.5
D	630	24.8
E	125	4.9

OPERATING INFORMATION		
CARRIER WEIGHT RANGE (MIN-MAX, MT)		75-120
OIL FLOW (MIN-MAX, L/MIN / GPM)	400-550	105.7-145
MAXIMUM OPERATING PRESSURE (BAR/PSI)	180	2,611
MAXIMUM BACK PRESSURE (BAR/PSI)	15	218
INPUT POWER (KW)		165
STRIKING FREQUENCY (BPM)		290-590
NOISE LEVEL /10M (DBA)		95
AUTOMATIC LUBRICATION		standard
SOUNDPROOFING		standard
BUCKET CYLINDER VALVE		standard
PRESSURIZATION		preinstalled

OPTIONS	CPN
PRESSURIZATION KIT	86372505
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

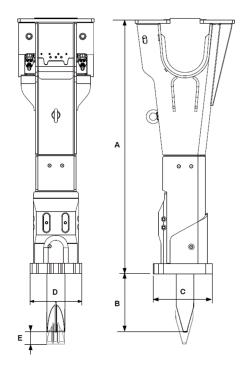

CONSUMABLES	CPN
GREASE CARTRIDGES (X20)	86784758
ABL2 GREASE BUCKET (24 KG)	86772969
ABLF GREASE BUCKET (24 KG)	86772977

MAINTENANCE KITS	CPN
BASIC	86798311
LEVEL 1	86798329
LEVEL 2	101023249

TOOLS								
DIAMETER (MM/IN)	214/8.43	214/8.43	214/8.43	214/8.43	214/8.43	214/8.43	214/8.43	214/8.43
LENGTH (MM/IN)	1,845/72.63	2,025/79.72	1,845/72.63	1,845/72.63	2,025/79.72	2,025/79.72	1,845/72.63	2,025/79.72
WEIGHT (KG/LB)	482.5/1,064	533/1,175	463.4/1,022	483.3/1,066	534.3/1,178	535.3/1,180	512/1,129	563/1,241
CPN	86792520	86804804	86792553	86759842	86799855	86799863	86792538	86804176



Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are standard written warranties, which will be furnished upon request. Komatsu and other trademarks and service marks used herein are the property of Komatsu Ltd., KMC, or their respective owners or licensees. © 2019 KMC. All rights reserved.



EN/US - V7000.EN.US.052020