



HYDRAULIC ROCK BREAKER

XL1000



NITROGEN
TECHNOLOGY
AT ITS BEST

BENEFITS

DESIGNED FOR 11 TO
17 TONNES CARRIERS

REDUCED COSTS,
UNCOMPROMISED
QUALITY

DESIGNED AND
PRODUCED
IN FRANCE

- High performance seals:
nitrogen pressure remains stable
over time, avoiding time consuming
controls and recharges.
- Standard essentials:
blank firing protection, energy
recovery system, reinforced housing,
full range of working tools.
- As green as others:
designed and manufactured by Montabert,
with the brand usual standards.

NITROGEN TECHNOLOGY AT ITS BEST

WEIGHT & DIMENSIONS

WEIGHT (KG/LB)

BREAKER	760	1,680
+ MOUNTED TOOL	828	1,826
+ MOUNTED ADAPTER PLATE (MAX)	1,006	2,218

DIMENSIONS (MM/IN)

A	1,481	58.3
B	2,018	79.5
C	340	13.4
D	109	16.1
E	51	2

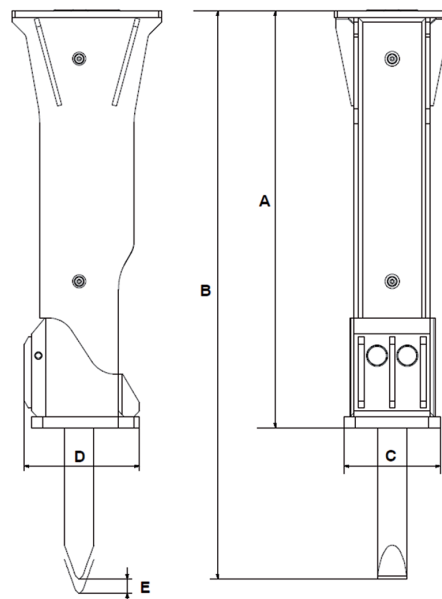
OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, MT)	11-17
OIL FLOW (MIN-MAX, L/MIN / GPM)	70-120 18.5-32
MAXIMUM OPERATING PRESSURE (BAR/PSI)	170 2,466
MAXIMUM BACK PRESSURE (BAR/PSI)	20 290
INPUT POWER (KW)	34
STRIKING FREQUENCY (BPM)	400-750
NOISE LEVEL /10M (DBA)	91
AUTOMATIC LUBRICATION	standard
SOUNDPROOFING	standard
INSPECTION KIT	standard
PRESSURIZATION	preinstalled

OPTIONS

CPN

PRESSURIZATION KIT	86766870
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request



CONSUMABLES

CPN





GREASE CARTRIDGES (X20)	86784758
ABL2 GREASE BUCKET (24 KG)	86772969
ABLF GREASE BUCKET (24 KG)	86772977

MAINTENANCE KITS

CPN

BASIC	86731775
-------	----------

TOOLS

				
DIAMETER (MM/IN)	106/4.17	106/4.17	106/4.17	106/4.17
LENGTH (MM/IN)	1,005/39.56	1,005/39.56	1,005/39.56	1,005/39.56
WEIGHT (KG/LB)	62/137	63/139	66/146	62/137
CPN	86722451	86722154	86722444	86622469



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert, KMC or Komatsu trademarks used herein are the property of their respective companies. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2019 Montabert. All rights reserved.

montabert.com montabertusa.com





HYDRAULIC ROCK BREAKER
XL1300

NITROGEN
TECHNOLOGY
AT ITS BEST



DESIGNED FOR 15 TO
22 TONNES CARRIERS

REDUCED COSTS,
UNCOMPROMISED
QUALITY

DESIGNED AND
PRODUCED
IN FRANCE

BENEFITS

- Hydraulic accumulator:
no more regular nitrogen controls
and recharges on jobsites.
- Made in France:
top notch steels and
manufacturing excellence.
- Operator friendly:
blank firing protection, automatic lubrication,
energy recovery system, easy maintenance.
- Carrier friendly:
anti-vibration dampeners,
pressure spikes removal.

NITROGEN TECHNOLOGY AT ITS BEST

XL1300


WEIGHT & DIMENSIONS

WEIGHT (KG/LB)

BREAKER	1,096	2,198
+ MOUNTED TOOL	1,195	2,416
+ MOUNTED ADAPTER PLATE (MAX)	1,314	2,897

DIMENSIONS (MM/IN)

A	1,607	63.3
B	2,181	85.9
C	370	14.6
D	414	16.3
E	55	2.2

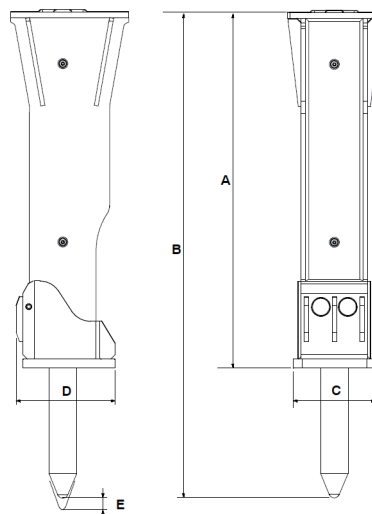

OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, MT)	15-22
OIL FLOW (MIN-MAX, L/MIN / GPM)	90-140 23.8-37
MAXIMUM OPERATING PRESSURE (BAR/PSI)	170 2,466
MAXIMUM BACK PRESSURE (BAR/PSI)	20 290
INPUT POWER (KW)	39.6
STRIKING FREQUENCY (BPM)	355-600
NOISE LEVEL /10M (DBA)	96
AUTOMATIC LUBRICATION	standard
SOUNDPROOFING	standard
INSPECTION KIT	standard
PRESSURIZATION	preinstalled

CONSUMMABLES

CPN

GREASE CARTRIDGES (X20)	86784758
ABL2 GREASE BUCKET (24 KG)	86772969
ABLF GREASE BUCKET (24 KG)	86772977

OPTIONS

CPN





PRESSURIZATION KIT	86766870
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

MAINTENANCE KITS

CPN

BASIC	86754538
-------	----------

TOOLS

				
DIAMETER (MM/IN)	124/4.88	124/4.88	124/4.88	124/4.88
LENGTH (MM/IN)	1100/43.31	1100/43.31	1100/43.31	1100/43.31
WEIGHT (KG/LB)	93/205	95/209	99/218	93/205
CPN	86723632	86725652	86725678	86725660



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert, KMC or Komatsu trademarks used herein are the property of their respective companies. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2019 Montabert. All rights reserved.

montabert.com montabertusa.com





HYDRAULIC ROCK BREAKER
XL1700



NITROGEN
TECHNOLOGY
AT ITS BEST

BENEFITS

DESIGNED FOR 18 TO
28 TONNES CARRIERS

REDUCED COSTS,
UNCOMPROMISED
QUALITY

DESIGNED AND
PRODUCED
IN FRANCE

- High performance seals:
nitrogen pressure remains stable
over time, avoiding time consuming
controls and recharges.
- Standard essentials:
blank firing protection, energy
recovery system, reinforced housing,
full range of working tools.
- As green as others:
designed and manufactured by Montabert,
with the brand usual standards.

NITROGEN TECHNOLOGY AT ITS BEST

XL1700


WEIGHT & DIMENSIONS

WEIGHT (KG/LB)

BREAKER	1,301	2,198
+ MOUNTED TOOL	1,432	2,416
+ MOUNTED ADAPTER PLATE (MAX)	1,777	2,897

DIMENSIONS (MM/IN)

A	1,725	67.9
B	2,337	92
C	409	16.1
D	499	19.6
E	58	2.3

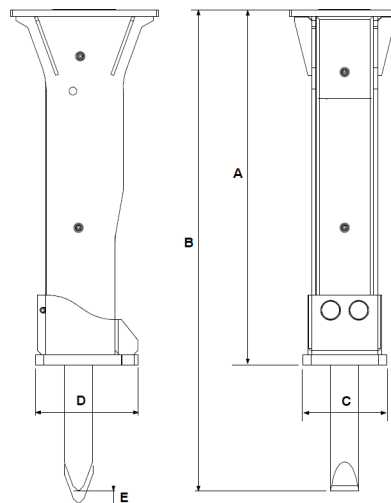

OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, MT)	18-28
OIL FLOW (MIN-MAX, L/MIN / GPM)	100-150 26.4-40
MAXIMUM OPERATING PRESSURE (BAR/PSI)	180 2,611
MAXIMUM BACK PRESSURE (BAR/PSI)	17 247
INPUT POWER (KW)	45
STRIKING FREQUENCY (BPM)	340-560
NOISE LEVEL /10M (DBA)	89
AUTOMATIC LUBRICATION	standard
SOUNDPROOFING	standard
INSPECTION KIT	standard
PRESSURIZATION	preinstalled

OPTIONS

CPN

PRESSURIZATION KIT	86766888
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

CONSUMMABLES

CPN

GREASE CARTRIDGES (X20)	86784758
ABL2 GREASE BUCKET (24 KG)	86772969
ABLF GREASE BUCKET (24 KG)	86772977

MAINTENANCE KITS

CPN

BASIC	101042757
-------	-----------

TOOLS

DIAMETER (MM/IN)	142/5.59	142/5.59	142/5.59	142/5.59
LENGTH (MM/IN)	1,345/52.95	1,345/52.95	1,345/52.95	1,345/52.95
WEIGHT (KG/LB)	148/326	153/337	158/348	148/326
CPN	86793254	86793270	86793288	86793262



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert, KMC or Komatsu trademarks used herein are the property of their respective companies. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2019 Montabert. All rights reserved.

montabert.com montabertusa.com





HYDRAULIC ROCK BREAKER
XL1900



NITROGEN
TECHNOLOGY
AT ITS BEST

BENEFITS

DESIGNED FOR 21 TO
31 TONNES CARRIERS

REDUCED COSTS,
UNCOMPROMISED
QUALITY

DESIGNED AND
PRODUCED
IN FRANCE

- High performance seals:
nitrogen pressure remains stable
over time, avoiding time consuming
controls and recharges.
- Standard essentials:
blank firing protection, energy
recovery system, reinforced housing,
full range of working tools.
- As green as others:
designed and manufactured by Montabert,
with the brand usual standards.

NITROGEN TECHNOLOGY AT ITS BEST

XL1900


WEIGHT & DIMENSIONS

WEIGHT (KG/LB)

BREAKER	1,488	3,280
+ MOUNTED TOOL	1,646	3,628
+ MOUNTED ADAPTER PLATE (MAX)	1,991	4,389

DIMENSIONS (MM/IN)

A	1,890	74.4
B	2,562	100.9
C	414	16.3
D	500	19.7
E	60	2.4

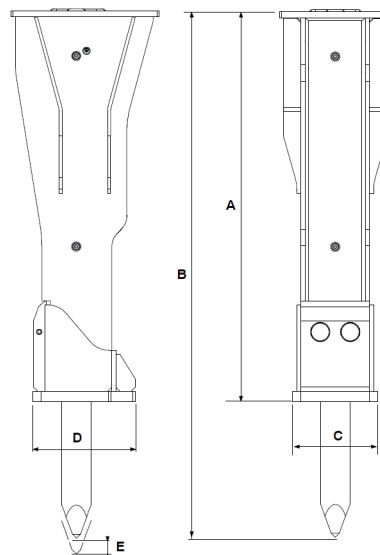

OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, MT)	21-31	
OIL FLOW (MIN-MAX, L/MIN / GPM)	120-180	31.7-48
MAXIMUM OPERATING PRESSURE (BAR/PSI)	180	2,611
MAXIMUM BACK PRESSURE (BAR/PSI)	17	247
INPUT POWER (KW)	54	
STRIKING FREQUENCY (BPM)	360-630	
NOISE LEVEL /10M (DBA)	101	
AUTOMATIC LUBRICATION	standard	standard
SOUNDPROOFING	standard	standard
INSPECTION KIT	standard	standard
PRESSURIZATION	preinstalled	preinstalled

CONSUMMABLES

	CPN
GREASE CARTRIDGES (X20)	86784758
ABL2 GREASE BUCKET (24 KG)	86772969
ABLF GREASE BUCKET (24 KG)	86772977





OPTIONS

	CPN
PRESSURIZATION KIT	86766888
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

MAINTENANCE KITS

	CPN
BASIC	101042758

TOOLS

				
DIAMETER (MM/IN)	142/5.59	142/5.59	142/5.59	142/5.59
LENGTH (MM/IN)	1,345/52.95	1,345/52.95	1,345/52.95	1,345/52.95
WEIGHT (KG/LB)	148/326	153/337	158/348	148/326
CPN	86793254	86793270	86793288	86793262



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert, KMC or Komatsu trademarks used herein are the property of their respective companies. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2019 Montabert. All rights reserved.

montabert.com montabertusa.com





HYDRAULIC ROCK BREAKER
XL2600



NITROGEN
TECHNOLOGY
AT ITS BEST

BENEFITS

DESIGNED FOR 28 TO
38 TONNES CARRIERS

REDUCED COSTS,
UNCOMPROMISED
QUALITY

DESIGNED AND
PRODUCED
IN FRANCE

- High performance seals:
nitrogen pressure remains stable
over time, avoiding time consuming
controls and recharges.
- Standard essentials:
blank firing protection, energy
recovery system, reinforced housing,
full range of working tools.
- As green as others:
designed and manufactured by Montabert,
with the brand usual standards.

NITROGEN TECHNOLOGY AT ITS BEST

XL2600


WEIGHT & DIMENSIONS

WEIGHT (KG/LB)

BREAKER	2,115	4,663
+ MOUNTED TOOL	2,306	5,084
+ MOUNTED ADAPTER PLATE (MAX)	2,751	6,065

DIMENSIONS (MM/IN)

A	2,075	81.7
B	2,677	105.4
C	450	17.7
D	520	20.5
E	70	2.8

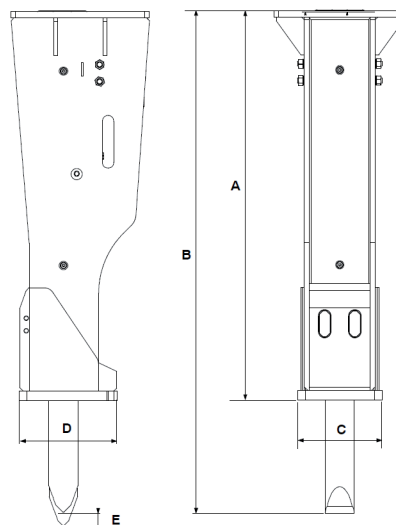

OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, MT)	28-38
OIL FLOW (MIN-MAX, L/MIN / GPM)	150-240 39.6-63
MAXIMUM OPERATING PRESSURE (BAR/PSI)	180 2,611
MAXIMUM BACK PRESSURE (BAR/PSI)	17 247
INPUT POWER (KW)	72
STRIKING FREQUENCY (BPM)	335-630
NOISE LEVEL /10M (DBA)	99
AUTOMATIC LUBRICATION	standard
SOUNDPROOFING	standard
INSPECTION KIT	standard
PRESSURIZATION	preinstalled

CONSUMMABLES

CPN

GREASE CARTRIDGES (X20)	86784758
ABL2 GREASE BUCKET (24 KG)	86772969
ABLF GREASE BUCKET (24 KG)	86772977

OPTIONS

CPN

PRESSURIZATION KIT	86766896
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

MAINTENANCE KITS

CPN

BASIC	101042759
-------	-----------

TOOLS

DIAMETER (MM/IN)	156/6.14	156/6.14	156/6.14	156/6.14
LENGTH (MM/IN)	1,350/53.15	1,350/53.15	1,350/53.15	1,350/53.15
WEIGHT (KG/LB)	178/362	185/408	191/421	178/392
CPN	86798188	86779675	86798204	86798196



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert, KMC or Komatsu trademarks used herein are the property of their respective companies. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2019 Montabert. All rights reserved.

montabert.com montabertusa.com

