



 HYDRAULIC ROCK BREAKER

SD6

NEW KEY ASSET
FOR ALL JOBSITES



DESIGNED FOR 700 KG
TO 1.2 TONS CARRIERS

POWERFUL,
SAFE AND COMPACT

LANDSCAPING, DEMOLITION,
TRENCHING, CIVIL ENGINEERING,
INSIDE AND OUTSIDE:
VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (KG / LB)

BREAKER	55	120
+ MOUNTED TOOL	59	128
+ MOUNTED ADAPTER PLATE (MAX)	73	161

DIMENSIONS (MM / IN)

A	865	34
B	200	8
C	281	11
D	595	23
E	147	6
F	172	7
G	24	0.94


OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, T)	0.7 - 1.2	
OIL FLOW (MIN-MAX, L/MIN / GPM)	12 - 23	3.2 - 6
MAXIMUM OPERATING PRESSURE (BAR / PSI)	110	1,600
MAXIMUM BACK PRESSURE (BAR / PSI)	20	290
INPUT POWER (KW)	4.2	
STRIKING FREQUENCY (MIN-MAX, BPM)	725 - 1,460	
GUARANTEED NOISE LEVEL (DB LWA)	118	
SOUNDPROOFING	standard	

OPTIONS

CPN

HOSES PROTECTION KIT	standard
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

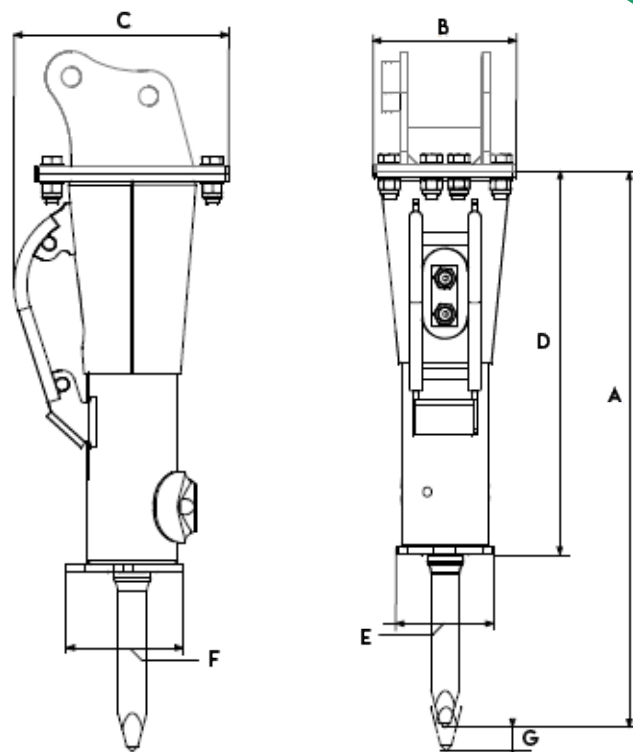

CONSUMABLES

CPN

GREASE CARTRIDGES (X48)

86799152

MAINTENANCE KITS

CPN

LEVEL 1

contact us

LEVEL 2

contact us

LEVEL 3 (+2 WARRANTY YEARS)

contact us

TOOLS

DIAMETER (MM / IN)	37 / 1.45	37 / 1.45
LENGTH (MM / IN)	438 / 17.2	438 / 17.2
WEIGHT (KG / LB)	3.7 / 8	3.37 / 7.42
CPN	86646106	86646114



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2021 Montabert. All rights reserved.

montabert.com




 HYDRAULIC ROCK BREAKER

SD8

NEW KEY ASSET
FOR ALL JOBSITES



DESIGNED FOR
1 TO 1.2 TONS CARRIERS

POWERFUL,
SAFE AND COMPACT

LANDSCAPING, DEMOLITION,
TRENCHING, CIVIL ENGINEERING,
INSIDE AND OUTSIDE:
VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (KG / LB)

BREAKER	71	156
+ MOUNTED TOOL	77	168
+ MOUNTED ADAPTER PLATE (MAX)	112	247

DIMENSIONS (MM / IN)

A	898	35
B	230	9
C	334	13
D	618	24
E	159	6.25
F	183	7.2
G	25	0.98


OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, T)	1 - 1.7	
OIL FLOW (MIN-MAX, L/MIN / GPM)	15 - 30	4 - 8
MAXIMUM OPERATING PRESSURE (BAR / PSI)	120	1,740
MAXIMUM BACK PRESSURE (BAR / PSI)	35	507
INPUT POWER (KW)	6	
STRIKING FREQUENCY (MIN-MAX, BPM)	800 - 1,600	
GUARANTEED NOISE LEVEL (DB LWA)	121	
SOUNDPROOFING	standard	

OPTIONS

CPN

HOSES PROTECTION KIT	standard
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

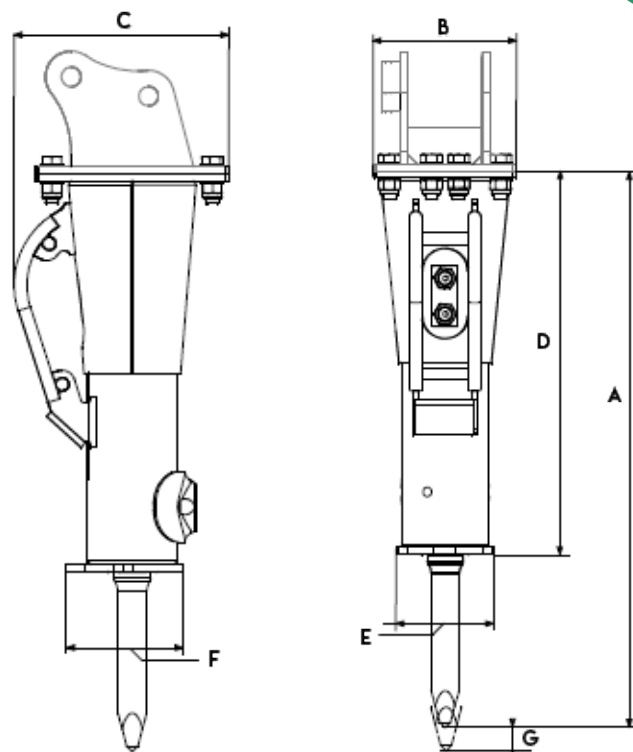

CONSUMABLES

CPN

GREASE CARTRIDGES (X48)

86799152

MAINTENANCE KITS

CPN

LEVEL 1

contact us

LEVEL 2

contact us

LEVEL 3 (+2 WARRANTY YEARS)

contact us

TOOLS

DIAMETER (MM / IN)	45 / 1.77	45 / 1.77	45 / 1.77
LENGTH (MM / IN)	455 / 17.9	455 / 17.9	455 / 17.9
WEIGHT (KG / LB)	5.1 / 11	5.2 / 11.46	5.4 / 12
CPN	86631918	86631900	86638566



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2021 Montabert. All rights reserved.

montabert.com




HYDRAULIC ROCK BREAKER

SD12

NEW KEY ASSET
FOR ALL JOBSITES



DESIGNED FOR
1.2 TO 2.2 TONS CARRIERS

POWERFUL,
SAFE AND COMPACT

LANDSCAPING, DEMOLITION,
TRENCHING, CIVIL ENGINEERING,
INSIDE AND OUTSIDE:
VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (KG / LB)

BREAKER	91	201
+ MOUNTED TOOL	97	214
+ MOUNTED ADAPTER PLATE (MAX)	133	293

DIMENSIONS (MM / IN)

A	926	36
B	230	9
C	346	14
D	637	25
E	166	7
F	190	7.48
G	34	1.33


OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, T)	1.2 - 2.2
OIL FLOW (MIN-MAX, L/MIN / GPM)	17 - 35 4.5 - 9
MAXIMUM OPERATING PRESSURE (BAR / PSI)	120 1,740
MAXIMUM BACK PRESSURE (BAR / PSI)	32 465
INPUT POWER (KW)	7
STRIKING FREQUENCY (MIN-MAX, BPM)	825 - 1,700
GUARANTEED NOISE LEVEL (DB LWA)	120
SOUNDPROOFING	standard

OPTIONS

CPN

HOSES PROTECTION KIT	standard
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

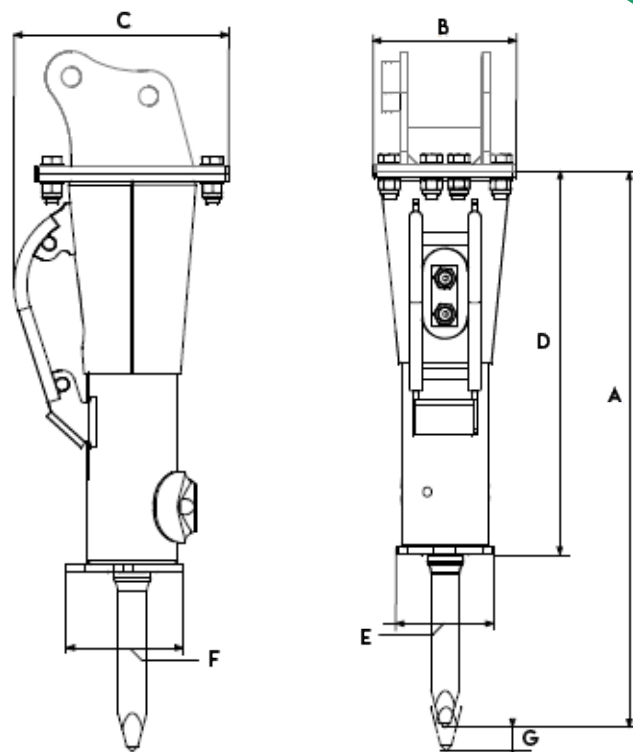

CONSUMABLES

CPN

GREASE CARTRIDGES (X48)	86799152
-------------------------	----------

MAINTENANCE KITS

CPN

LEVEL 1	contact us
LEVEL 2	contact us
LEVEL 3 (+2 WARRANTY YEARS)	contact us

TOOLS

DIAMETER (MM / IN)	47 / 1.85	47 / 1.85
LENGTH (MM / IN)	475 / 18.7	475 / 18.7
WEIGHT (KG / LB)	5.8 / 12.7	6 / 13
CPN	86621216	86620739



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2021 Montabert. All rights reserved.

montabert.com





HYDRAULIC ROCK BREAKER

SD16



NEW KEY ASSET
FOR ALL JOBSITES

DESIGNED FOR
1.5 TO 3.7 TONS CARRIERS

POWERFUL,
SAFE AND COMPACT

LANDSCAPING, DEMOLITION,
TRENCHING, CIVIL ENGINEERING,
INSIDE AND OUTSIDE:
VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (KG / LB)

BREAKER	121	266
+ MOUNTED TOOL	131	288
+ MOUNTED ADAPTER PLATE (MAX)	194	428

DIMENSIONS (MM / IN)

A	1,036	41
B	280	11
C	427	17
D	701	28
E	186	7.32
F	205	8.07
G	34	1.33


OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, T)	1.5 - 3.7
OIL FLOW (MIN-MAX, L/MIN / GPM)	25 - 50 6.6 - 13
MAXIMUM OPERATING PRESSURE (BAR / PSI)	120 1,740
MAXIMUM BACK PRESSURE (BAR / PSI)	32 465
INPUT POWER (KW)	10
STRIKING FREQUENCY (MIN-MAX, BPM)	770 - 1,550
GUARANTEED NOISE LEVEL (DB LWA)	122
SOUNDPROOFING	standard

OPTIONS

CPN

HOSES PROTECTION KIT	standard
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

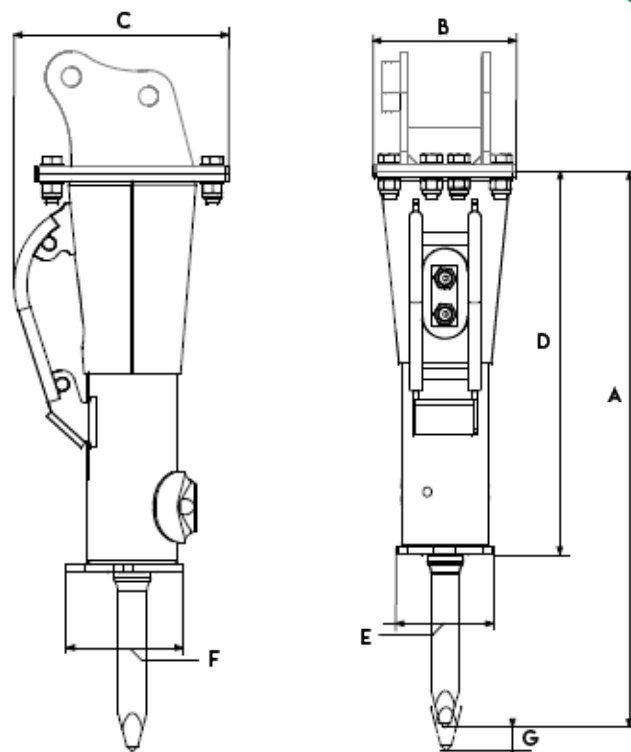

CONSUMABLES

CPN

GREASE CARTRIDGES (X48)

86799152

MAINTENANCE KITS

CPN

LEVEL 1

contact us

LEVEL 2

contact us

LEVEL 3 (+2 WARRANTY YEARS)

contact us

TOOLS

DIAMETER (MM / IN)	55 / 2.16	55 / 2.16
LENGTH (MM / IN)	550 / 21.6	550 / 21.6
WEIGHT (KG / LB)	9.7 / 21	10 / 22
CPN	86625688	86625670



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2021 Montabert. All rights reserved.

montabert.com





HYDRAULIC ROCK BREAKER

SD22



NEW KEY ASSET
FOR ALL JOBSITES

DESIGNED FOR
2.5 TO 5.3 TONS CARRIERS

POWERFUL,
SAFE AND COMPACT

LANDSCAPING, DEMOLITION,
TRENCHING, CIVIL ENGINEERING,
INSIDE AND OUTSIDE:
VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (KG / LB)

BREAKER	184	405
+ MOUNTED TOOL	200	440
+ MOUNTED ADAPTER PLATE (MAX)	286	631

DIMENSIONS (MM / IN)

A	1,182	47
B	320	13
C	466	18.3
D	812	31.9
E	214	8.42
F	240	9.44
G	45	1.77


OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, T)	2,5 - 5,3
OIL FLOW (MIN-MAX, L/MIN / GPM)	30 - 65 8 - 17.2
MAXIMUM OPERATING PRESSURE (BAR / PSI)	120 1,740
MAXIMUM BACK PRESSURE (BAR / PSI)	30 435
INPUT POWER (KW)	13
STRIKING FREQUENCY (MIN-MAX, BPM)	600 - 1,360
GUARANTEED NOISE LEVEL (DB LWA)	120
SOUNDPROOFING	standard

OPTIONS

CPN

HOSES PROTECTION KIT	standard
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

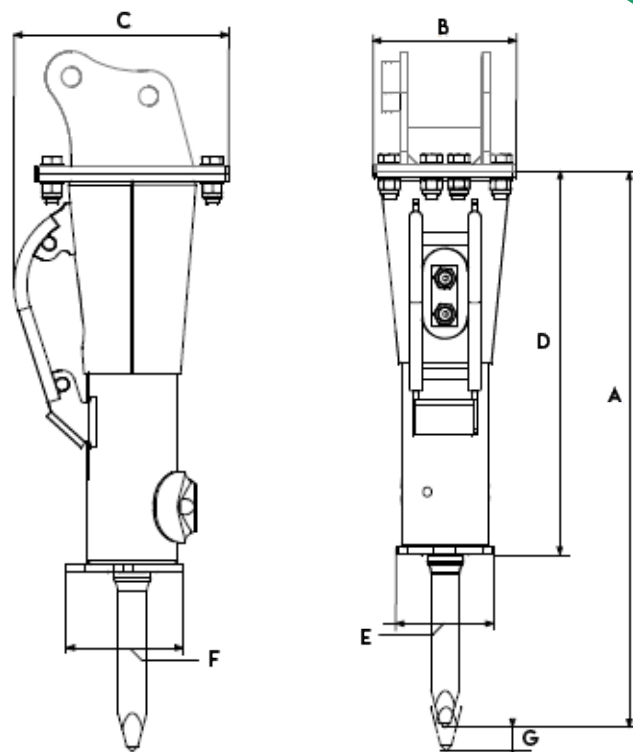

CONSUMABLES

CPN

GREASE CARTRIDGES (X48)	86799152
-------------------------	----------

MAINTENANCE KITS

CPN

LEVEL 1	contact us
LEVEL 2	contact us
LEVEL 3 (+2 WARRANTY YEARS)	contact us

TOOLS

DIAMETER (MM / IN)	65 / 3	65 / 3
LENGTH (MM / IN)	618 / 24	618 / 24
WEIGHT (KG / LB)	14.8 / 33	15.2 / 34
CPN	86636370	86636362



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2021 Montabert. All rights reserved.

montabert.com





HYDRAULIC ROCK BREAKER

SD28



NEW KEY ASSET
FOR ALL JOBSITES

DESIGNED FOR
3 TO 7.5 TONS CARRIERS

POWERFUL,
SAFE AND COMPACT

LANDSCAPING, DEMOLITION,
TRENCHING, CIVIL ENGINEERING,
INSIDE AND OUTSIDE:
VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (KG/LB)

BREAKER	204	451
+ MOUNTED TOOL	231	511
+ MOUNTED ADAPTER PLATE (MAX)	318	571

DIMENSIONS (MM/IN)

A	1,221	48
B	320	13
C	472	19
D	863	33.9
E	223	8.77
F	250	9.84
G	46	1.81


OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, T)	3 - 7.5	
OIL FLOW (MIN-MAX, L/MIN / GPM)	40 - 75	10.5 - 20
MAXIMUM OPERATING PRESSURE (BAR / PSI)	120	1,740
MAXIMUM BACK PRESSURE (BAR / PSI)	30	435
INPUT POWER (KW)	13	
STRIKING FREQUENCY (MIN-MAX, BPM)	630 - 1,420	
GUARANTEED NOISE LEVEL (DB LWA)	125	
SOUNDPROOFING	standard	

OPTIONS

CPN

HOSES PROTECTION KIT	standard
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

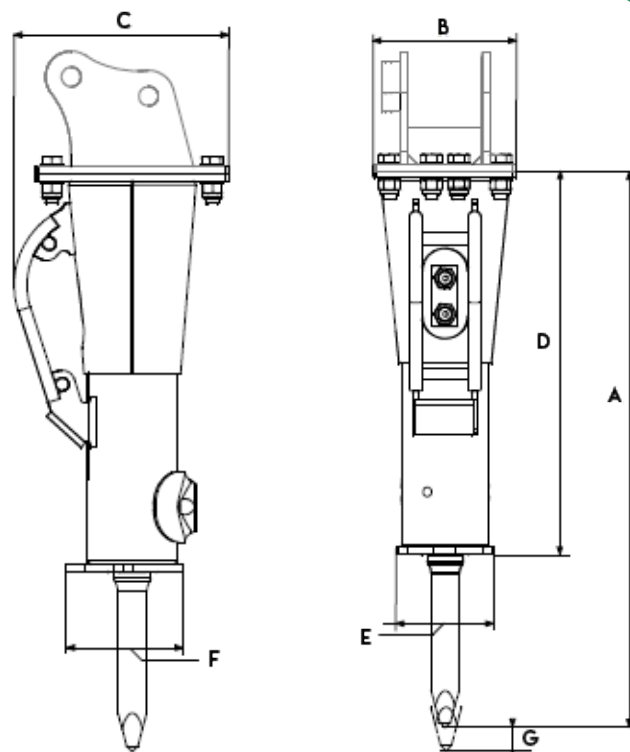

CONSUMABLES

CPN

GREASE CARTRIDGES (X48)

86799152

MAINTENANCE KITS

CPN

LEVEL 1

contact us

LEVEL 2

contact us

LEVEL 3 (+2 WARRANTY YEARS)

contact us

TOOLS

DIAMETER (MM / IN)	72 / 2.8	72 / 2.8
LENGTH (MM / IN)	662 / 26	662 / 26
WEIGHT (KG / LB)	19.4 / 43	27.1 / 60
CPN	86636396	86636388



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2021 Montabert. All rights reserved.

montabert.com




HYDRAULIC ROCK BREAKER

SD36



NEW KEY ASSET
FOR ALL JOBSITES

DESIGNED FOR
4 TO 10 TONS CARRIERS

POWERFUL,
SAFE AND COMPACT

LANDSCAPING, DEMOLITION,
TRENCHING, CIVIL ENGINEERING,
INSIDE AND OUTSIDE:
VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (KG/LB)

BREAKER	279	615
+ MOUNTED TOOL	304	670
+ MOUNTED ADAPTER PLATE (MAX)	396	855

DIMENSIONS (MM/IN)

A	1,374	54
B	432	17
C	535	21
D	978	39
E	240	9.44
F	270	11
G	47.5	1.87


OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, T)	4 - 10
OIL FLOW (MIN-MAX, L/MIN / GPM)	55 - 100 14.5 - 26.5
MAXIMUM OPERATING PRESSURE (BAR / PSI)	125 1,815
MAXIMUM BACK PRESSURE (BAR / PSI)	20 290
INPUT POWER (KW)	20.8
STRIKING FREQUENCY (MIN-MAX, BPM)	700 - 1,540
GUARANTEED NOISE LEVEL (DB LWA)	124
SOUNDPROOFING	standard

OPTIONS

CPN

HOSES PROTECTION KIT	standard
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

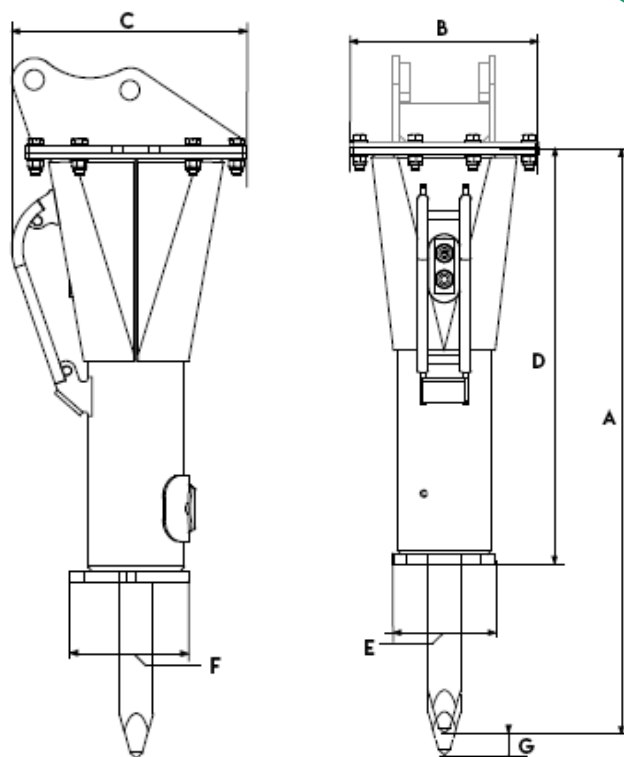

CONSUMABLES

CPN

GREASE CARTRIDGES (X48)

86799152

MAINTENANCE KITS

CPN

LEVEL 1

contact us

LEVEL 2

contact us

LEVEL 3 (+2 WARRANTY YEARS)

contact us

TOOLS

DIAMETER (MM / IN)	76 / 2.99	76 / 2.99	76 / 2.99
LENGTH (MM / IN)	709 / 27.9	709 / 27.9	709 / 27.9
WEIGHT (KG / LB)	23 / 51	24 / 53	25 / 55
CPN	86639226	86639218	86641438



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2021 Montabert. All rights reserved.

montabert.com




HYDRAULIC ROCK BREAKER

SD42



NEW KEY ASSET
FOR ALL JOBSITES

DESIGNED FOR
5 TO 12 TONS CARRIERS

POWERFUL,
SAFE AND COMPACT

LANDSCAPING, DEMOLITION,
TRENCHING, CIVIL ENGINEERING,
INSIDE AND OUTSIDE:
VERSATILE AND EFFICIENT

BENEFITS

- **Hydraulic accumulator:** no more regular nitrogen controls and recharges on jobsites.
- **Tie rod free:** less weight and cost, more power and reliability.
- **Made in France:** superior quality steel and manufacturing excellence.
- **Improved soundproofing :** lower noise levels for urban jobsites.
- **Easy handling:** two lifting points to handle the breaker with perfect balance and safety, also acting as hoses protection.
- **Tool changing:** new user friendly, simple, safe and reliable system, with one single retainer.

NEW KEY ASSET FOR ALL JOBSITES

WEIGHT & DIMENSIONS

WEIGHT (KG / LB)

BREAKER	331	761
+ MOUNTED TOOL	365	836
+ MOUNTED ADAPTER PLATE (MAX)	456	1,021

DIMENSIONS (MM / IN)

A	1,494	59
B	442	17
C	556	22
D	1,059	42
E	270	11
F	295	12
G	48	2


OPERATING INFORMATION

CARRIER WEIGHT RANGE (MIN-MAX, T)	5 - 12	
OIL FLOW (MIN-MAX, L/MIN / GPM)	70 - 120	18.5 - 32
MAXIMUM OPERATING PRESSURE (BAR / PSI)	125	1,815
MAXIMUM BACK PRESSURE (BAR / PSI)	20	290
INPUT POWER (KW)	25	
STRIKING FREQUENCY (MIN-MAX, BPM)	700 - 1,440	
GUARANTEED NOISE LEVEL (DB LWA)	123	
SOUNDPROOFING	standard	

OPTIONS

CPN

HOSES PROTECTION KIT	standard
ADAPTER PLATE	upon request
SPECIAL PAINTING	upon request

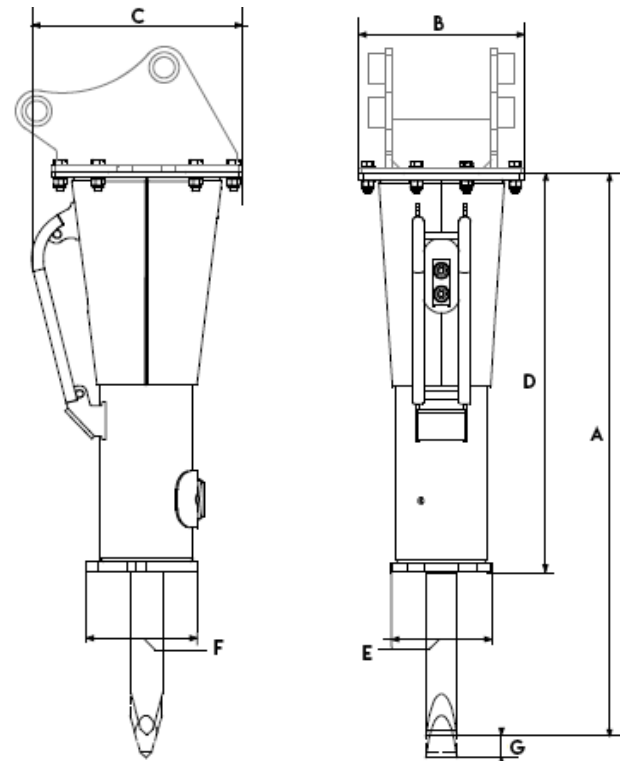

CONSUMABLES

CPN

GREASE CARTRIDGES (X48)	86799152
-------------------------	----------

MAINTENANCE KITS

CPN

LEVEL 1	contact us
LEVEL 2	contact us
LEVEL 3 (+2 WARRANTY YEARS)	contact us

TOOLS

DIAMETER (MM / IN)	84 / 3.3	84 / 3.3	84 / 3.3
LENGTH (MM / IN)	785 / 31	785 / 31	785 / 31
WEIGHT (KG / LB)	32 / 71	32 / 71	34 / 75
CPN	86665338	86665361	86685047



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2021 Montabert. All rights reserved.

montabert.com

